

VOGUE

WASHROOM CUBICLES



Attractive seamless
flush facade



SCRATCH RESISTANT



SOLVENT RESISTANT



FOOD GRADE



IMPACT RESISTANT



DURABLE



HEAT RESISTANT



EASY TO CLEAN



QUICK INSTALLATION



ALU. TOPRAIL



HINGE WITH COVER



ALU. FOOT



S.S BOX SECTION



CONCEALED HINGE



ADJUSTABLE FOOT





ALU. TOPRAIL



HINGE WITH COVER



S.S. SKIRTING



S.S. TOPRAIL



SELF RISING HINGE




S.S. SKIRTING



KEY FEATURE:

- Different material options.
- Vast finish range.
- Various panel thickness options.
- Privacy lock with red/white indicator and provision for emergency access.
- Aluminium hardwares are polyester powder coated to match panel color.

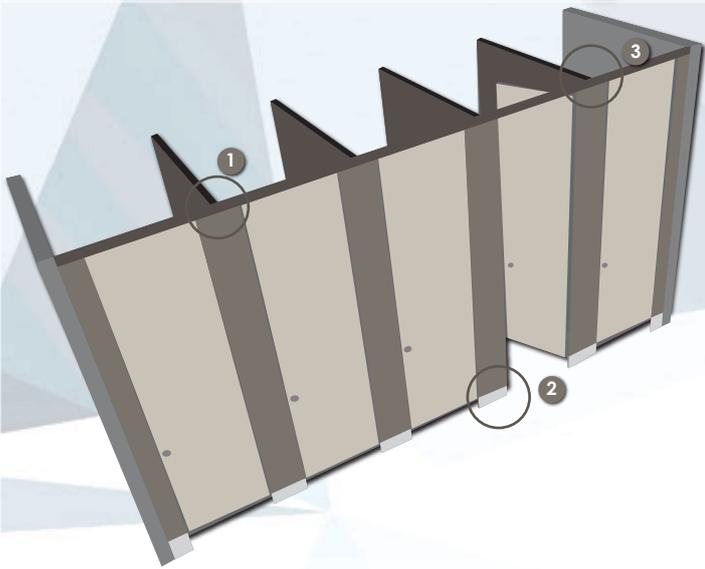

HARDWARE OPTION

- 1 Top rail - Extruded aluminium
- 2 Floor support - stainless steel skirting (Grade 316)
- 3 Wall / Divider Support (Grade 316)

SPECIFICATION:

Panel Thickness (nominal): 13mm Thick SGL panels

Divider Panels: 13mm

Height: 2000mm

Depth/Width: According to layout

Door Opening: 700mm

Bottom Clearance: 50mm - 150mm

MATERIAL:

SGL: (Solid grade compact laminate) available in wide range of colors as well as in digital prints.

HPL: (High pressure laminate) its heat, moisture, scratch and impact resistant HPL faced panels, with matching edge banding along with different surface options.

SANDWICH PANEL: 25 to 32mm thick sandwich panel having compact laminate faces on both the sides.

STANDARD S.S. HARDWARE (GRADE 316):

